


Features

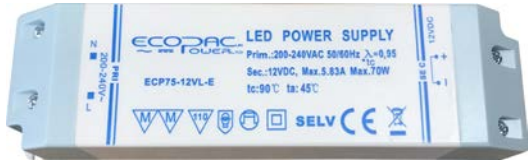

- Input Voltage 200-240Vac
- Output power 70-75W (Please note 12V is 70W)
- Input Frequency 50/60Hz
- High efficiency up to 85%
- Protections: Short Circuit/Overload/Over Temp/Over Voltage
- Compact and light-weight plastic case
- 3 Year warranty

Model		ECP75-12VL-E	ECP75-24VL-E
Output	DC Voltage	12V	24V
	Voltage Accuracy	±0.5V	
	Current Range	0 - 5.83A	0 - 3.13A
	Rated Power	70W	75W
Input	Voltage Range	±5%	
	Frequency Range	50/60Hz	
	Power Factor (Typ.)	PF≥0.9	
	Full Load Efficiency (Typ.)	85%	85%
	Inrush Current	<75A	
Protection	Short Circuit	Ta, 0.94-1.06 times of input voltage	
	Over Load	Ta, 0.94-1.06 times of input voltage, 1.5 times of rated power	
	Over Voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	
Environment	Working TEMP.	-20 - +45°C	
	Working Humidity	45 – 85% RH	
Safety&EMC	Safety Standards	EN61347-1 EN61347-2-13	
	EMC EMISSION	EN61000-4-2,3,4,5,6 EN61547	
	EMC IMMUNITY	EN55015	
Others	Size	170*44.5*28.2mm (L*W*H)	

Dimensions

